

# NoTail™ Drop-in Coupler & WDM



These connectorized couplers and WDMs are free of fiber pigtailed and ready to be inserted in optical systems without the headaches of tinkering with fragile and messy fiber pigtailed. Another important feature of these devices is the short optical path delay (~30 cm) between the input and the output, desirable in many systems where the optical path balance is important, such as interferometric systems, ultra-short pulse systems, and fiber laser systems. Additionally, these devices have four strong magnets mounted on the back for temporary but secure placement on standard optical tables.

## Specifications:

	Coupler	WDM	
Operating Center Wavelength	1310, 1550, or 1310/1550	1310/1550	1480/1550
Operating Bandwidth	±40 nm	±15nm	±5 nm
Wavelength Isolation	N/A	> 16 dB	≥15 dB
Insertion Loss	See table below	0.5 dB	0.6 dB
Excess Loss	0.3 dB typical, 0.7 dB max.		
Return Loss	FC/PC connectors: 50 dB, FC/APC connectors: 55 dB		
PDL	0.1 dB typical		
Thermal Stability	0.1 dB typical		
Operating Temperature	0 to 70 °C		
Storage Temperature	-40 to 85 °C		
Fiber Type	SMF-28		
Port Configuration	1 × 2 or 2 × 2		
Dimensions	3.5" × 1.5" × 5/8" (L × W × H)		

Note: Values are referenced with connectors in table above.


Other WDM wavelength combinations may be available. Contact General Photonics for details.

## Insertion Loss (IL) Table

Coupling Ratio	IL (Single Window)	IL (Dual Windows)
50/50	< 3.4/3.4	< 3.6/3.6
40/60	< 4.4/2.6	< 4.7/2.7
30/70	< 5.7/1.9	< 6.0/1.9
20/80	< 7.6/1.25	< 7.9/1.3
10/90	< 11.0/0.65	< 11.2/0.75
5/95	< 14.2/0.4	< 14.6/0.4
1/99	< 21.5/0.2	< 22.5/0.25

Note: Values are referenced without connectors for IL table only.

## Dimensions (in inches):

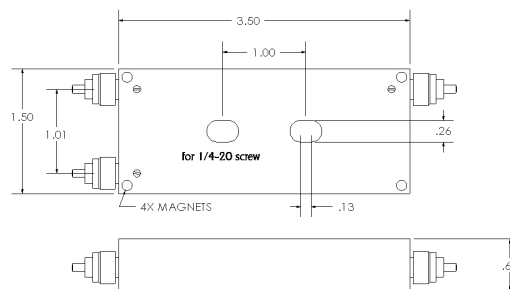

Tech Info: p. 223

## Ordering Information:

Visit our website at [www.generalphotonics.com](http://www.generalphotonics.com) for detailed configuration information.