


High-Speed Tunable Filter

Features / Benefits

- Excellent thermal stability
- High scanning speed
- Small package size
- Customizable sweep range
- High resolution for accurate spectrum analysis
- Low insertion loss
- Low PDL

Applications

- High resolution optical spectrum analysis (OSA)
- Optical performance monitoring (OPM) and optical channel monitoring (OCM)
- Tunable channel add/drop for WDM
- Tunable optical noise filtering
- Tunable laser and instrument
- Optical IR spectroscopy
- Sensor application and optical/electronic warfare
- Biomedical imaging and testing
- Medical diagnosis
- Environmental protection, food safety, anti-drug, and anti-terrorism applications

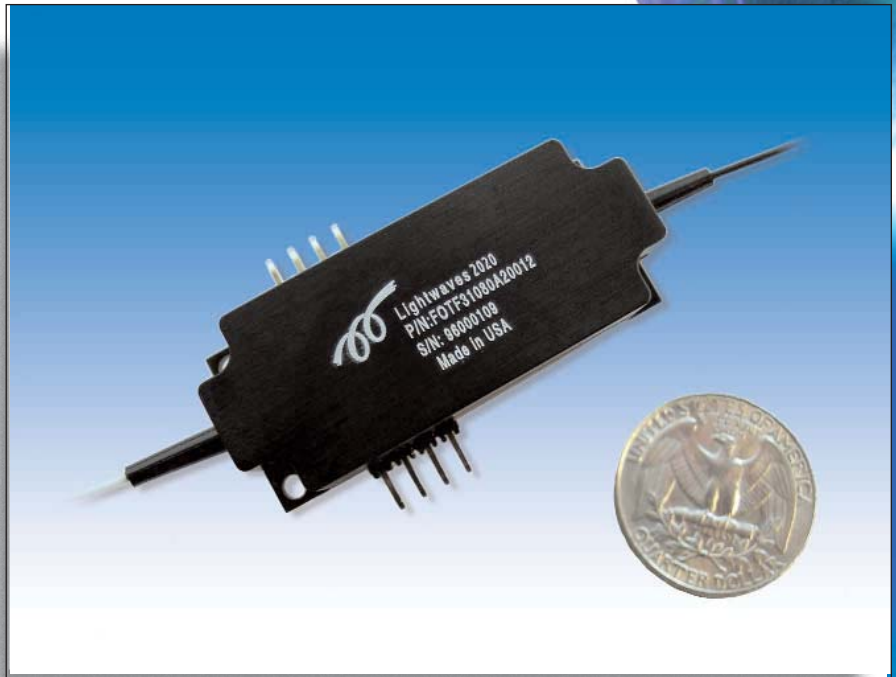

The Lightwaves2020 High-Speed Tunable Filter is a tunable optical filter to choose specified wavelengths over a certain range. The wavelength tuning is achieved by applying a control voltage. The typical wavelength scanning frequency is $>1\text{kHz}$.

This tunable filter can be customized to different operation wavelengths and scanning ranges. In addition to low polarization dependent loss (PDL) performance, its thermal stability is exceptional with a TEC package.




High-Speed Tunable Filter

Optical Specifications

Parameters	Unit	Specification
Operating Wavelength Range ¹	nm	C-, L-, or C+L-band
Scanning Wavelength Range ²	nm	35, 80, or customer specified
Standard Finesse	-	100, 200, 500, 1000, 2000, 4000, or customer specified
Bandwidth @ -3dB ³	nm	0.4, 0.2, 0.1, 0.05, 0.02 or customer specified
Insertion Loss ⁴	dB	3 (Typical)
Side-lobe Suppression Ratio	dB	≥20
PDL	dB	<0.2
PMD	ps	<0.1
Scanning Speed	kHz	5 (Typical)
Control Voltage, V_{FSR} , for one Free Spectrum Range tuning (without driver) ⁶	Volt	0-300 VDC
Control Voltage, V_{FSR} , for one Free Spectrum Range tuning (with driver)	Volt	0-5 VDC

- Note: 1. Other wavelength range is also available upon request.
 2. Scanning wavelength range can be specified within the range of 20nm ~ 150nm. Outside this range is also available upon special request.
 3. 3dB bandwidth can be estimated by formula, 3dB bandwidth ~ scanning wavelength range / finesse.
 4. Depend on finesse. IL < 2.0dB is achievable upon special request.
 5. Filter with >5kHz scanning speed is also available upon special request.
 6. Lower control voltage version, V_{FSR} < 150VDC, is also available upon special request.
 7. All specification referred without connectors.

Dimensions

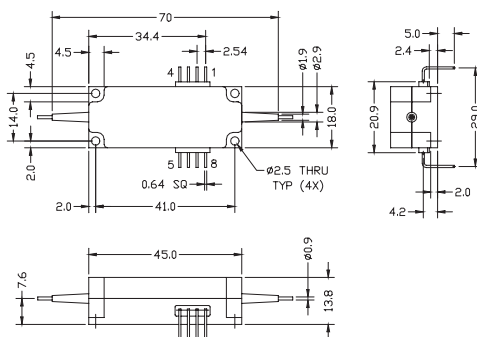

Units: mm

Ordering Information

F	O	T	F					A		0	0		
<div><div><div>Wavelength</div><div>1= C-band</div><div>2= L-band</div><div>3= C+L band</div><div>4= others</div></div><div><div>FWHM</div><div>1= 0.4nm</div><div>2= 0.2nm</div><div>3= 0.1nm</div><div>4= others</div></div><div><div>Scanning Range</div><div>eg: 035= 35nm</div><div>080= 80nm</div></div><div><div>1= without Driver</div><div>2= with Driver</div></div><div><div>Pigtail Type</div><div>0= 250μm bare fiber</div><div>1= 900μm loose tube</div></div><div><div>Connector</div><div>0= None</div><div>1= FC/UPC</div><div>2= FC/APC</div><div>3= SC/UPC</div><div>4= SC/APC</div><div>5= LC/UPC</div><div>6= MU/UPC</div></div></div>													
* This product information is subject to change without notice													

* This product information is subject to change without notice