

TIA4C-5633

56 Gb/s Quad TIA

MICRAM

Type: Module	Technology: SiGe	f_T / f_{max} : 170/250 GHz	Metallization: 4	Ref.-No.: R1036
--------------	------------------	-------------------------------	------------------	-----------------

Brief description

The TIA4C-5633 is a versatile High-Speed 4 channel Transimpedance Amplifier for data rates up to 56 Gb/s to match new 100GbE applications. Key features are:

- 4 independent ampl. Channels,
- single-ended and differential I/O operation,
- very high small signal gain,
- small signal and limiting operation,
- high cut-off frequency,
- low noise,
- adjustable input offset,
- output sense for offset control,
- tunable frequency response,
- dc and ac coupled operation,
- adjustable output voltage swing,
- single supply voltage.

Each channel of the TIA4C-5633 consists of a fully symmetrical differential input buffer. This allows differential as well as single ended drive and is optimized for 50 Ω line termination.

For applications which require adjustable input bias or compensation of DC input currents (e.g. photodiodes) the TIA4C-5633 allows to adjust the bias input current for each channel independently. This feature can e.g. be used for offset cancellation, pulse shaping, duty cycle adjustment or vertical sampling-point adjustment.


Each channel exhibits a fully symmetrical differential output buffer which provides either one differential output signal or two single ended output signals. The output amplitude is set to typ. 500 mV_{pp} (differential signal) and can be increased to about 1000mV_{pp} by using the output swing adjustment pin.

Main fields of application are multi-channel optical receivers for data-rates >100Gbit/s (e.g. PoL-MUX QPSK). By using the TIA4C-5633 together with a photo diode array, a small form factor 4 channel optical receiver module can be assembled.


Package

The TIA4C-5633 is available as bare die or as ruggedized module equipped with K-Connectors. Other connector types upon request.

TIA4C-5633 Module with K-Connectors

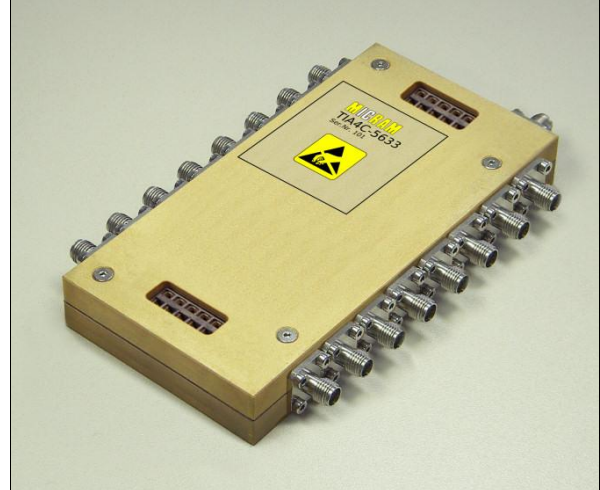

Block diagram of the TIA4C-5633

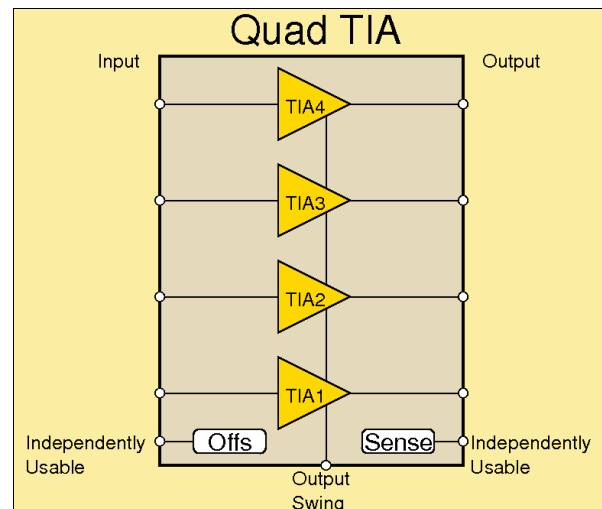

TIA4C-5633 data

Power supply, (V_{ee})	-3.1 ... -3.5 V
Current consumption	320 mA @ -3.3 V
S11, S22 ($f < 20$) GHz	-12 dB
Input amplitude range	5 mV _{pp} - 1 V _{pp}
Output amplitude	0.5 V _{pp} typ., 1 V _{pp} max.
Gain / Transimpedance	~ 38 dB / 4 k Ω
Cut off frequency	~ 35 GHz (adjustable)
Input related noise	< 25 pA / $\sqrt{\text{Hz}}$

For further information on the TIA4C-5633 please contact your MICRAM sales representative.

Copyright 2009
All rights reserved

Product specifications in this document are subject to change without notice.

MICRAM Microelectronic GmbH
Test & Measurement Solutions

www.micram.com
Tel.: +49-234-9708-300