



ASNT5190B-MOD DC-64Gbps Broadband Digital 1:2 Demultiplexer Module

- High speed broadband 1:2 Demultiplexer
- External control of internal clock's duty cycle
- Exhibits low jitter and limited temperature variation over industrial temperature range
- Ideal for high speed proof-of-concept prototyping
- Fully differential CML input interface
- Fully differential CML output interface with 400mV single-ended swing
- Single -3.3V power supply
- Power consumption: 600mW
- Custom metal package with excellent high-speed characteristics
- Incorporates a SiGe IC for high performance, yield, and reliability



DESCRIPTION

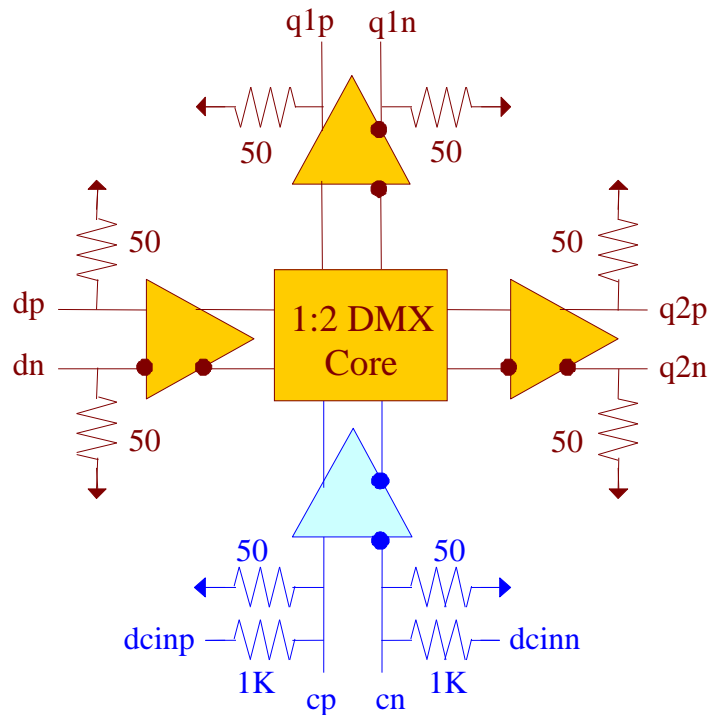


Fig. 1. IC Functional Block Diagram

The temperature stable ASNT5190B-MOD is a module with a SiGe IC inside. It can be utilized as a high speed 1:2 demultiplexer, and is intended for use in high-speed measurement / test equipment. The internal IC shown in Fig. 1 can receive a high speed differential data input signal dp/dn and effectively demultiplex it into two high speed differential data output signals $q1p/q1n$ and $q2p/q2n$ by using a high speed differential clock input signal cp/cn . The duty cycle of the internal clock can be adjusted through ports $dcinp/dcinn$.

The part's I/O's support the CML logic interface with on chip 50Ω termination to vcc and may be used differentially, AC/DC coupled, single-ended, or in any combination (see also POWER SUPPLY CONFIGURATION). In the DC-coupling mode, the input signal's common mode voltage should comply with the specifications shown in ELECTRICAL CHARACTERISTICS. In the AC-coupling mode, the input termination provides the required common mode voltage automatically. The differential DC signaling mode is recommended for optimal performance.

POWER SUPPLY CONFIGURATION

The part operates with a single negative supply ($vcc = 0.0V = \text{ground}$ and $vee = -3.3V$).



ABSOLUTE MAXIMUM RATINGS

Caution: Exceeding the absolute maximum ratings shown in Table 1 may cause damage to this product and/or lead to reduced reliability. Functional performance is specified over the recommended operating conditions for power supply and temperature only. AC and DC device characteristics at or beyond the absolute maximum ratings are not assumed or implied. All max voltage limits are referenced to ground.

Table 1. Absolute Maximum Ratings

Parameter	Min	Max	Units
Supply Voltage (vee)		-3.6	V
Power Consumption		0.65	W
RF Input Voltage Swing (SE)		1.0	V
Case Temperature		+90	°C
Storage Temperature	-40	+100	°C
Operational Humidity	10	98	%
Storage Humidity	10	98	%

TERMINAL FUNCTIONS

TERMINAL			DESCRIPTION
Name	No.	Type	
High-Speed I/Os			
dp	21	CML input	Differential data input signals with internal 50Ohm termination to VCC
dn	23		
q1p	17	CML output	Differential data output signals with internal 50Ohm termination to VCC
q1n	15		
q2p	11	CML output	Differential data output signals with internal 50Ohm termination to VCC
q2n	9		
cp	3	CML input	Differential clock input signals with internal 50Ohm termination to VCC
cn	5		
Control Ports			
dcp	19	Analog inputs	cp common mode control voltage
dcn	7		cn common mode control voltage
Supply and Termination Voltages			
Name	Description		Pin Number
GND	Ground (0V)		10
-V	Negative power supply (-3.3V)		1, 13



ELECTRICAL CHARACTERISTICS

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
General Parameters					
Negative power supply	-3.1	-3.3	-3.5	V	±6%
Ground		0.0		V	External ground
Supply current		180		mA	
Power consumption		600		mW	
Junction temperature	-40	25	125	°C	
HS Input Data (dp/dn)					
Data rate	DC		64	Gbps	
Swing	0.05		1.0	V	Differential or SE, p-p
CM Voltage Level	vcc-0.8		vcc	V	Must match for both inputs
HS Input Clock (cp/cn)					
Frequency	DC		32	GHz	
Swing	0.05		1.0	V	Differential or SE, p-p
CM Voltage Level	vcc-0.8		vcc	V	Must match for both inputs
Duty cycle	45	50	55	%	
HS Output Data (q1p/q1n, q2p/q2n)					
Data rate	DC		32	Gbps	
Logic "1" level		vcc		V	
Logic "0" level		vcc-0.4		V	With external 50Ohm DC termination
Rise/Fall times	6	8	10	ps	20%-80%
Output Jitter			1	ps	Peak-to-peak
Common Mode Control Ports (dcp/dcn)					
Input Signal Range	-3.3		0.0	V	



PACKAGE INFORMATION

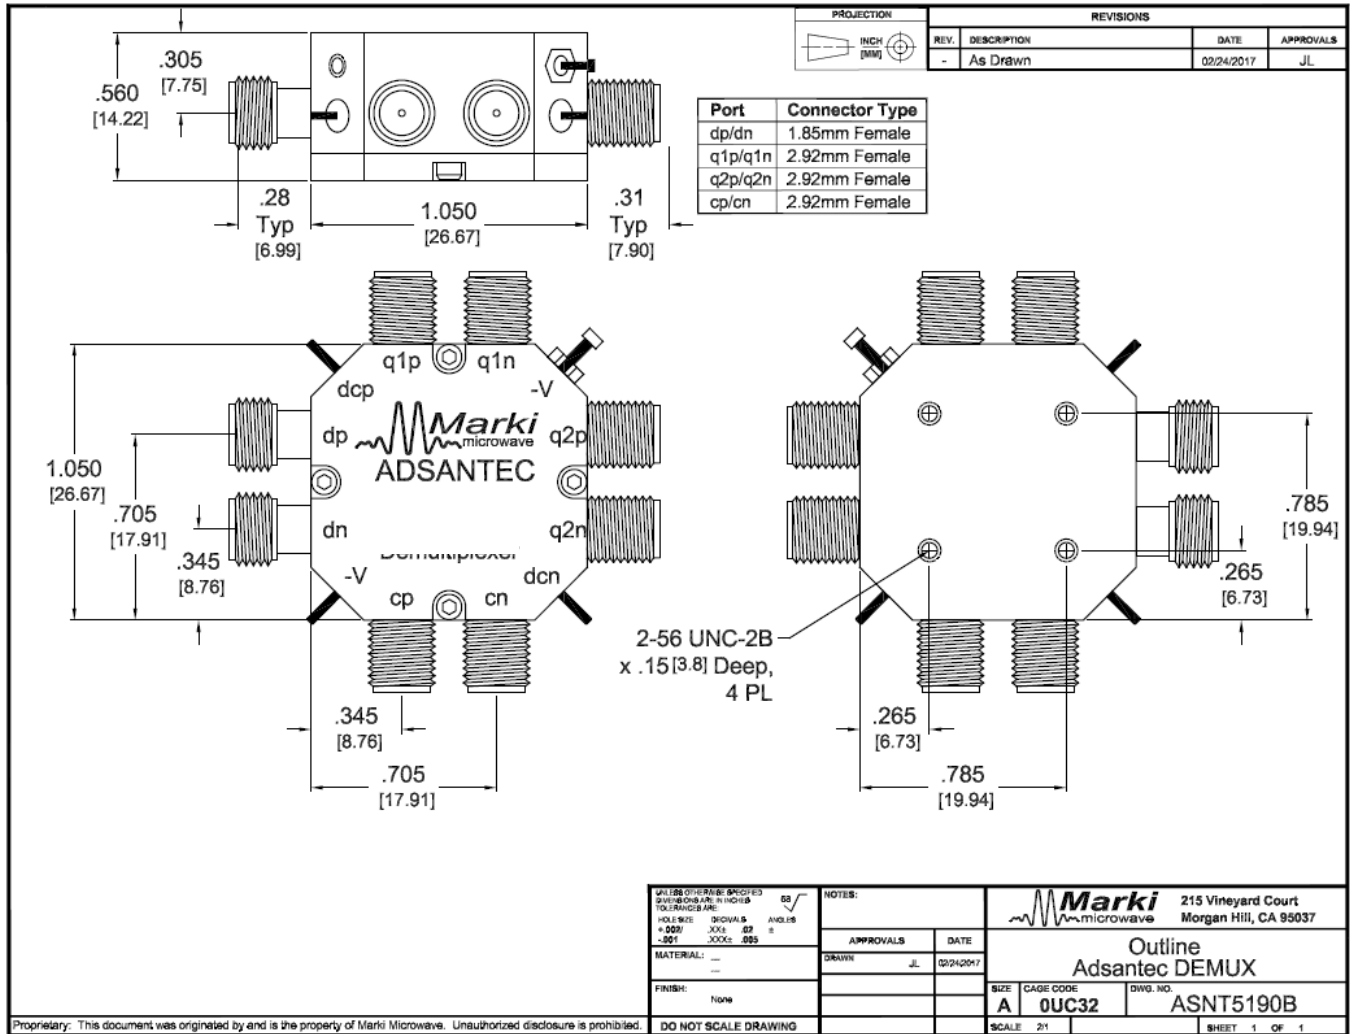


Fig. 2. ASNT5190B-MOD Package Drawing



ADSANTEC

Ultra High-Speed Mixed Signal ASICs

Advanced Science And Novel Technology Company, Inc.
27 Via Porto Grande, Rancho Palos Verdes, CA 90275

Offices: 310-377-6029 / 310-803-9284 Fax: 310-377-9940
www.adsantec.com

REVISION HISTORY

Revision	Date	Changes
1.0.1	03-2018	First release