

TIA5633

56 Gb/s Transimpedance Amplifier



Type: Module	Technology: SiGe	f_T / f_{max} : 170/250 GHz	Metallization: 4	Ref.-No.: R1033
--------------	------------------	-------------------------------	------------------	-----------------

Brief description

The TIA5633 is a versatile High-Speed Transimpedance Amplifier for data rates up to 56 Gb/s. Key features are:

- single-ended and differential I/O operation,
- very high small signal gain,
- small signal and limiting operation,
- high cut-off frequency,
- low noise,
- adjustable input offset,
- output sense for offset control,
- tunable frequency response,
- dc and ac coupled operation,
- adjustable output voltage swing,
- single supply voltage of -3.3V.

The TIA5633 consists of a fully symmetrical differential input buffer. This allows differential as well as single ended drive and is optimized for 50 Ω line termination.

For applications which require adjustable input bias or compensation of DC input currents (e.g. photodiodes) the TIA5633 allows to adjust the bias input current for each input independently. This feature can e.g. be used for offset cancellation, pulse shaping, duty cycle adjustment or vertical sampling point adjustment.

The TIA5633 exhibits a fully symmetrical differential output buffer which provides either one differential output signal or two single ended output signals. The nominal output amplitude is set to typ. 500 mV_{pp} (differential signal) and can be increased to about 1000mV_{pp} by using the output swing adjustment pin.


Main fields of application are:

- TIA for photoreceiver,
- single-ended to differential conversion,
- differential to single-ended conversion,
- amplitude regeneration,
- active power/signal splitter,
- 50 Ω line driver.


Package

The TIA5633 is available as bare die or as ruggedized module equipped with K-Connectors. Other connector types upon request.

TIA5633 Module with K-Connectors

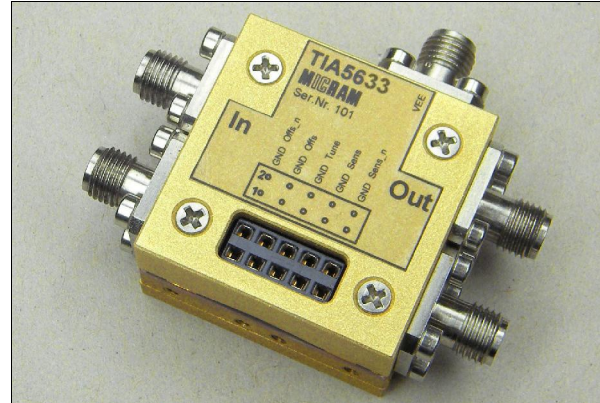

Block diagram of the TIA5633

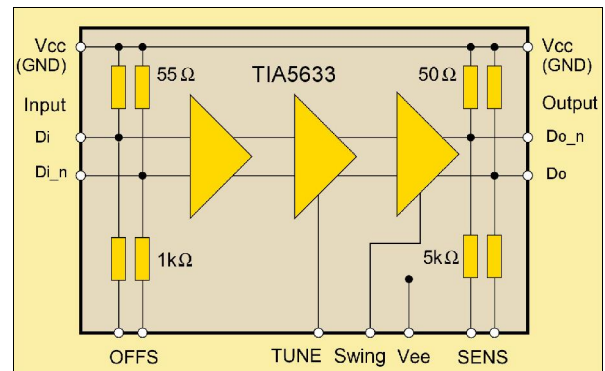

TIA5633 data

Power supply, (V _{ee})	-3.1 ... -3.5 V
Current consumption	79 mA @ -3.3 V
S11, S22 (f < 20) GHz	-12 dB
Input amplitude range	5 mV _{pp} - 1 V _{pp}
Output amplitude	0.5 V _{pp} typ., 1 V _{pp} max.
Gain / Transimpedance	~ 38 dB / 4 k Ω
Cut off frequency	~ 35 GHz (adjustable)
Input related noise	< 25 pA / $\sqrt{\text{Hz}}$

For further information on the TIA5633 please contact your MICRAM sales representative.

Copyright 2009
All rights reserved

Product specifications in this document are subject to change without notice.

MICRAM Microelectronic GmbH
Test & Measurement Solutions

www.micram.com
Tel.: +49-234-9708-300

