



# Compact Low Cost Pre-Amplifier EDFA (Full Function)

## Features/Benefits

- Low cost
- APC, ACC mode
- Low power consumption
- Wide operating temperature range
- Standard communication interface (RS232, I<sup>2</sup>C)

## Applications

- Metropolitan and access networks
- Digital CATV
- Amplifier for long-haul network
- Single-channel or DWDM sub-systems
- Optical cross-connects
- Optical add/drop modules
- Power equalization and flexible pre-emphasis

## Full Function Pin Assignment

Pin	RS-232	I <sup>2</sup> C
1	Serial input	Serial bi-di data
2	GND	GND
3	Serial output	Serial clock
4	Alarm status	Alarm status
5	GND	GND
6	Power supply +3.3V	Power supply +3.3V

## Safety Information

### ESD Protection

The laser diodes and photodiodes in the module can be easily destroyed by electrostatic discharge. Use wrist straps, grounded work surfaces, and anti-static techniques when operating this module. When not in use, the module shall be kept in a static-free environment.



## Optical Specifications

Parameters	Unit	Min.	Typ.	Max.
Operating Wavelength Range	nm	1528	-	1562
Input Optical Power (P <sub>in</sub> )	dBm	- 30	-	- 10
Signal Gain @ P <sub>in</sub> = -30dBm	dB	20 25	-	-
Noise Figure @P <sub>in</sub> = -30dBm	dB	-	5	6
Polarization Dependent Gain	dB	-	-	0.5
Polarization Mode Dispersion	ps	-	-	0.5
Return Loss (Pump LD off)	dB	35	-	-
Operating Temperature Range	°C	- 5	-	70
Fiber Type	-	SMF-28, 900µm loose tube		
Dimensions	mm	40 x 70 x 12		

## Electrical Specifications

Parameters	Unit	Min.	Typ.	Max.
Output Monitor Accuracy	dB	-0.5	-	+ 0.5
Power Supply Voltage	V	3.1	3.3	3.5
Power Consumption	W	-	-	1.0

## Dimensions

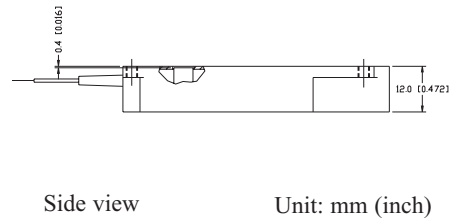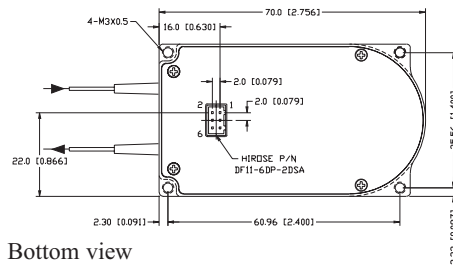

## Ordering Information

N	O	A	P	F				0	0	0	1	1	
				Signal Gain @ P <sub>in</sub> = -30dBm	Default Mode			Electronic Interface			Fiber Length	Connector	
				20= 20dB	1= APC			R= RS-232			1= 1.0±0.1m	0= None	
				25= 25dB	2= ACC			C= FC				1= FC/UPC	
												2= FC/APC	
												3= SC/UPC	
												4= SC/APC	
												5= LC/UPC	
												6= MU/UPC	
											Pigtail Type	1= 900µm loose tube	

This product information is subject to change without notice.