

UNCOOLED 1300nm SLED TRANSCEIVER


APPLICATIONS

- Fiber optic gyroscopes
- Fiber optic current sensors
- Fiber optic stress sensors



FEATURES



- Built-in beam splitter & receive photodiode
- Built-in monitor diode
- High optical output power
- Low crosstalk

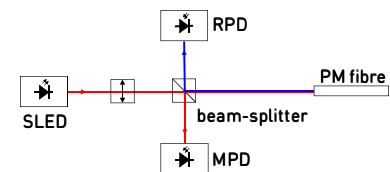

OPTIONS

- PM fiber pigtail
- Highly linear external MPD, high speed receiver PD
- Different beamsplitter ratios (affecting output power and responsivity)
- Different wavelengths, bandwidths and output powers, reduced crosstalk
- Internal polarizer (20 dB module PER)
- Telcordia GR-468-CORE qualification

TYPICAL CURVES

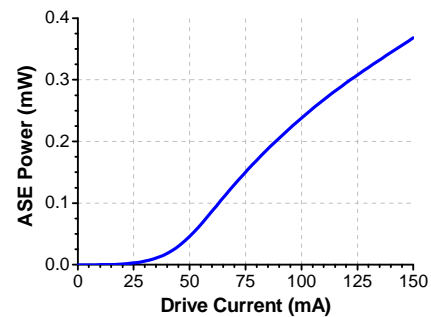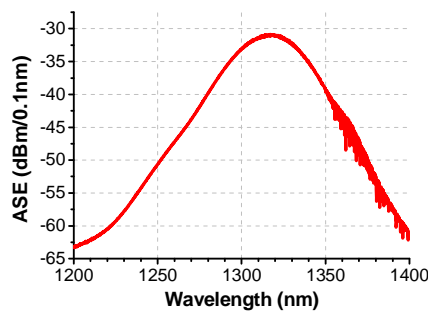

TYPICAL PERFORMANCE

Part number	EXT220003
Power in SMF (mW)	0.2
Bandwidth FWHM (nm)	40
Center wavelength (nm)	1310
Spectral ripple (dB)	0.6
Receiver Responsivity (A/W)	0.15
Crosstalk (dB)	-30
Package	CUSTOM

EXALOS AG
Wagistrasse 21
CH-8952 Schlieren
Switzerland
Phone +41 43 444 60 90
Fax +41 43 444 60 99
sales@exalos.com

EXALOS Inc.
60 Teal Drive
Langhorne, PA 19047
United States
Phone +1 215 752 2115
Fax +1 215 752 3663
salesusa@exalos.com